

K3




Full HD 1080p

Auto Update

DVB-S2 tuner ready

Multimedia IPTV

User Interface

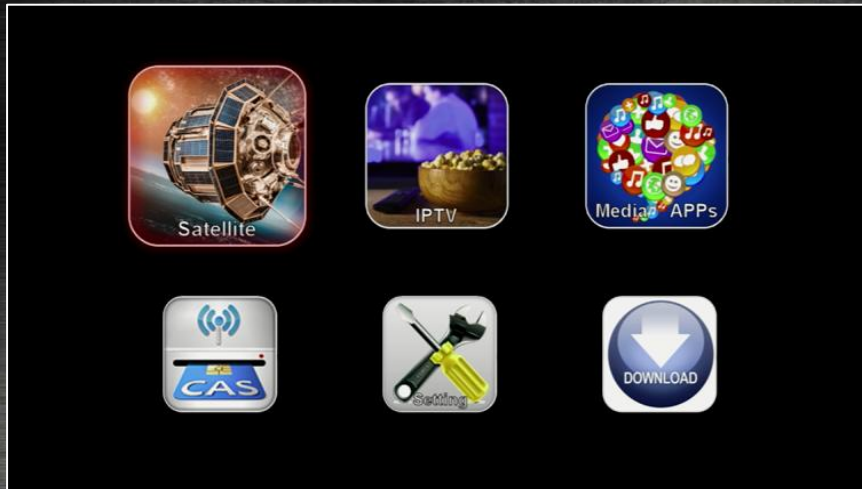

Home Menu



Settings



Installation

DVB-S2



Channel List

- Favourite
- Search/sort
- Channel edit



EPG

- 7days Full EPG
- All Channel EPG



Info bar

- USB PVR
- TV guide

Multimedia



Multimedia Apps Support




MÜ IPTV middleware

User Friendly




Web Interface function

- IPTV configuration
- DVB S2 configuration

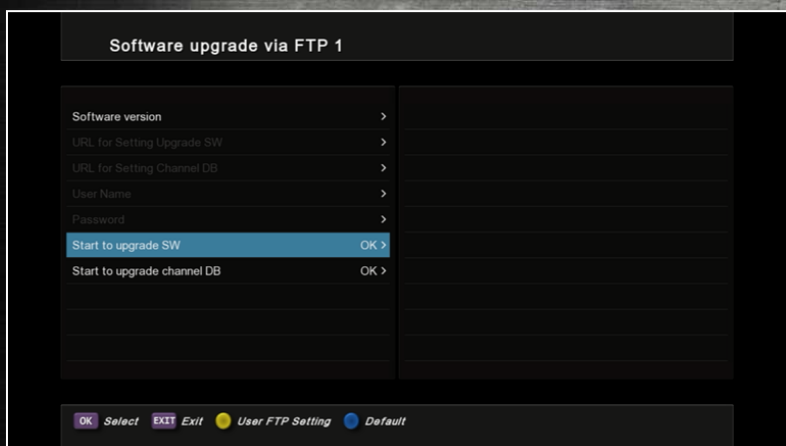

FTP server

- Exclusive SW support
- Channel list support

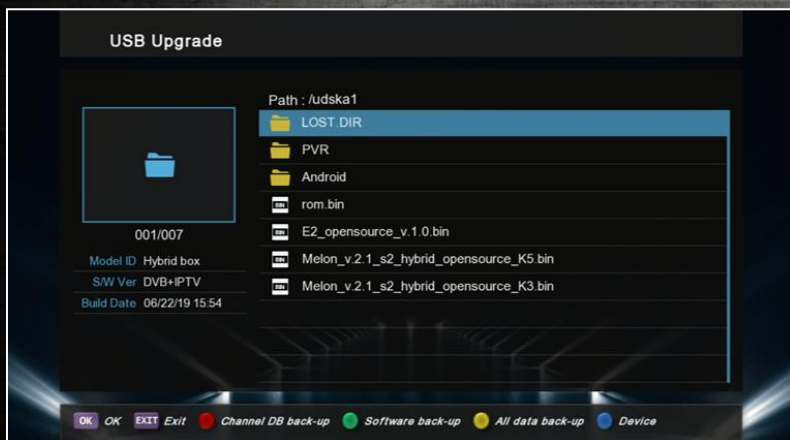

Channel backup via USB

- Download&Upload

Specification

MAIN CHIPSET

CPU High-Performance 667MHz 32-bit MIPS 24KEc

MEMORY

FLASH MEMORY 128Mb

DDR3 SDRAM 2Gb

DVB-S2

INPUT FREQUENCY RANGE 950MHz ~ 2150MHz, ANT IN
INPUT/OUTPUT CONNECTOR F-Type, IEC 169-24 and Female

INPUT FREQUENCY RANGE 950MHz ~ 2150MHz, ANT IN

INPUT SIGNAL LEVEL -65dBm ~ -25dBm

INPUT IMPEDANCE 75Ω Unbalanced

INPUT VOLTAGE

Vertical: +13.5V (+14.5V at high voltage)

Horizontal: +18V (+18.5V at high voltage)

Current: Max. 500mA (Short Circuit Protection)

22KHz TONE Frequency 22KHz±4KHz

Amplitude 0.6±0.2Vpp

DiSEqC CONTROL 1.0, 1.1 & 1.2 Version Compliant

CHANNEL SELECTION PLL Frequency Synthesizer

VIDEO DECODER

TRANSPORT STREAM MPEG-2 ISO/IEC 13818-2

MPEG-4 Part 2

PROFILE LEVEL MPEG-2 MP@ML, MPEG-2 MP@HL

MPEG-4 AVC/H.264 HP@L4.1

VIDEO FORMAT 4:3, 16:9, Letter Box

VIDEO RESOLUTION 1080p, 1080i, 720p, 576p, 576i, 480p, 480i

AUDIO DECODER

AUDIO DECODING MPEG/MusiCam Layer I & II, AC3 Down Mix

AUDIO MODE Mono / Dual / Joint Stereo / Stereo

AUDIO BIT RATE 32Kbits/s – 384Kbits/s

SAMPLING FREQUENCY 32, 44.1, 48KHz

AUDIO / VIDEO / DATA INPUT/OUTPUT

HD Out 1 x HD Out

USB 2 x (USB 2.0 Host), Front & Rear

USB-WiFi USB WiFi support

S/PDIF Digital Audio

Ethernet LAN for RJ-45

POWER SUPPLY

INPUT VOLTAGE DC 12V 2A

TYPE Adapter Type

PROTECTION Separate internal fuse

The input should be protected against lightning.

PHYSICAL CHARACTERISTICS

DIMENSION (W x H x D) 180 x 40 x 100 (mm)

NET WEIGHT Approx. 1.0Kg

OPERATING TEMPERATURE 0°C to +45°C

STORAGE TEMPERATURE -10°C to +70°C